

Fig. 1

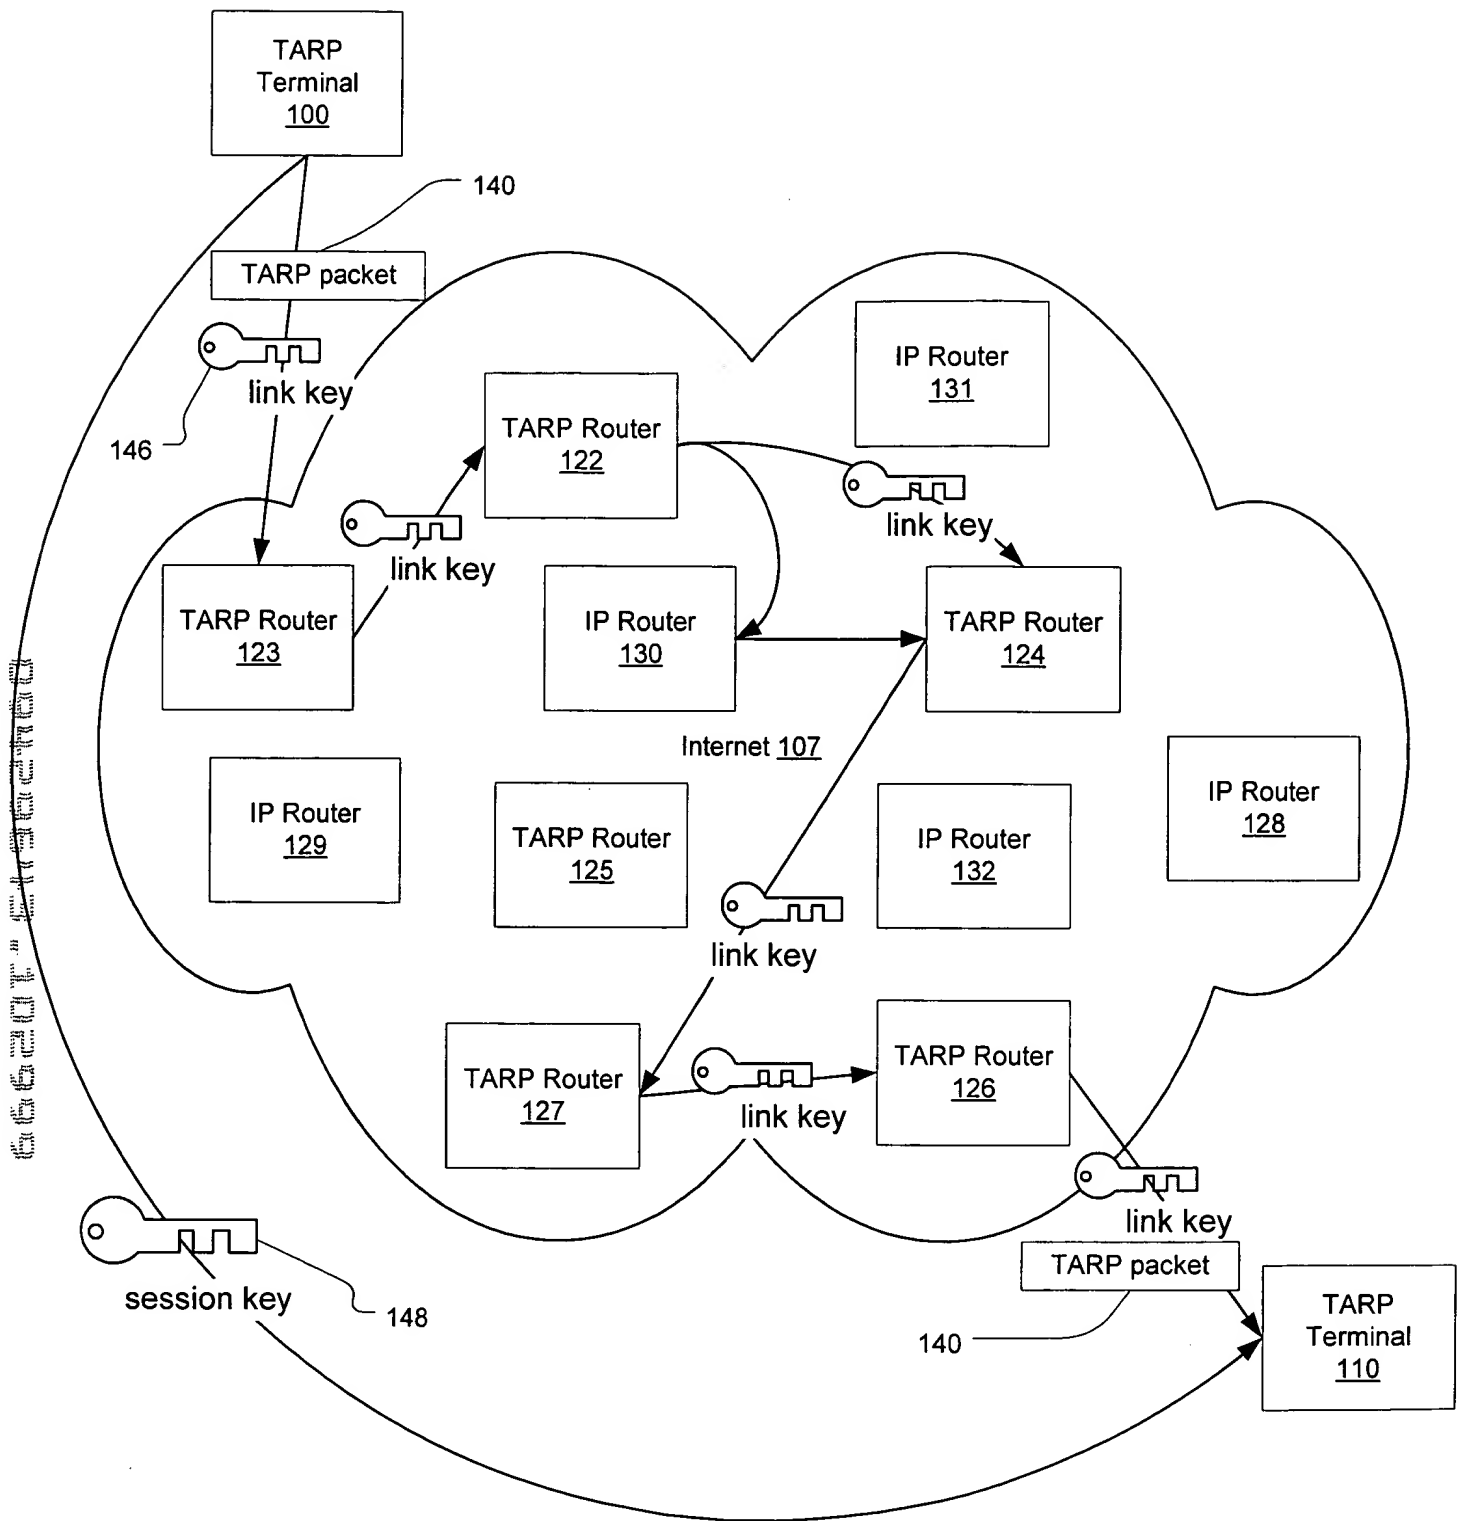


Fig. 2

SCANNED 6

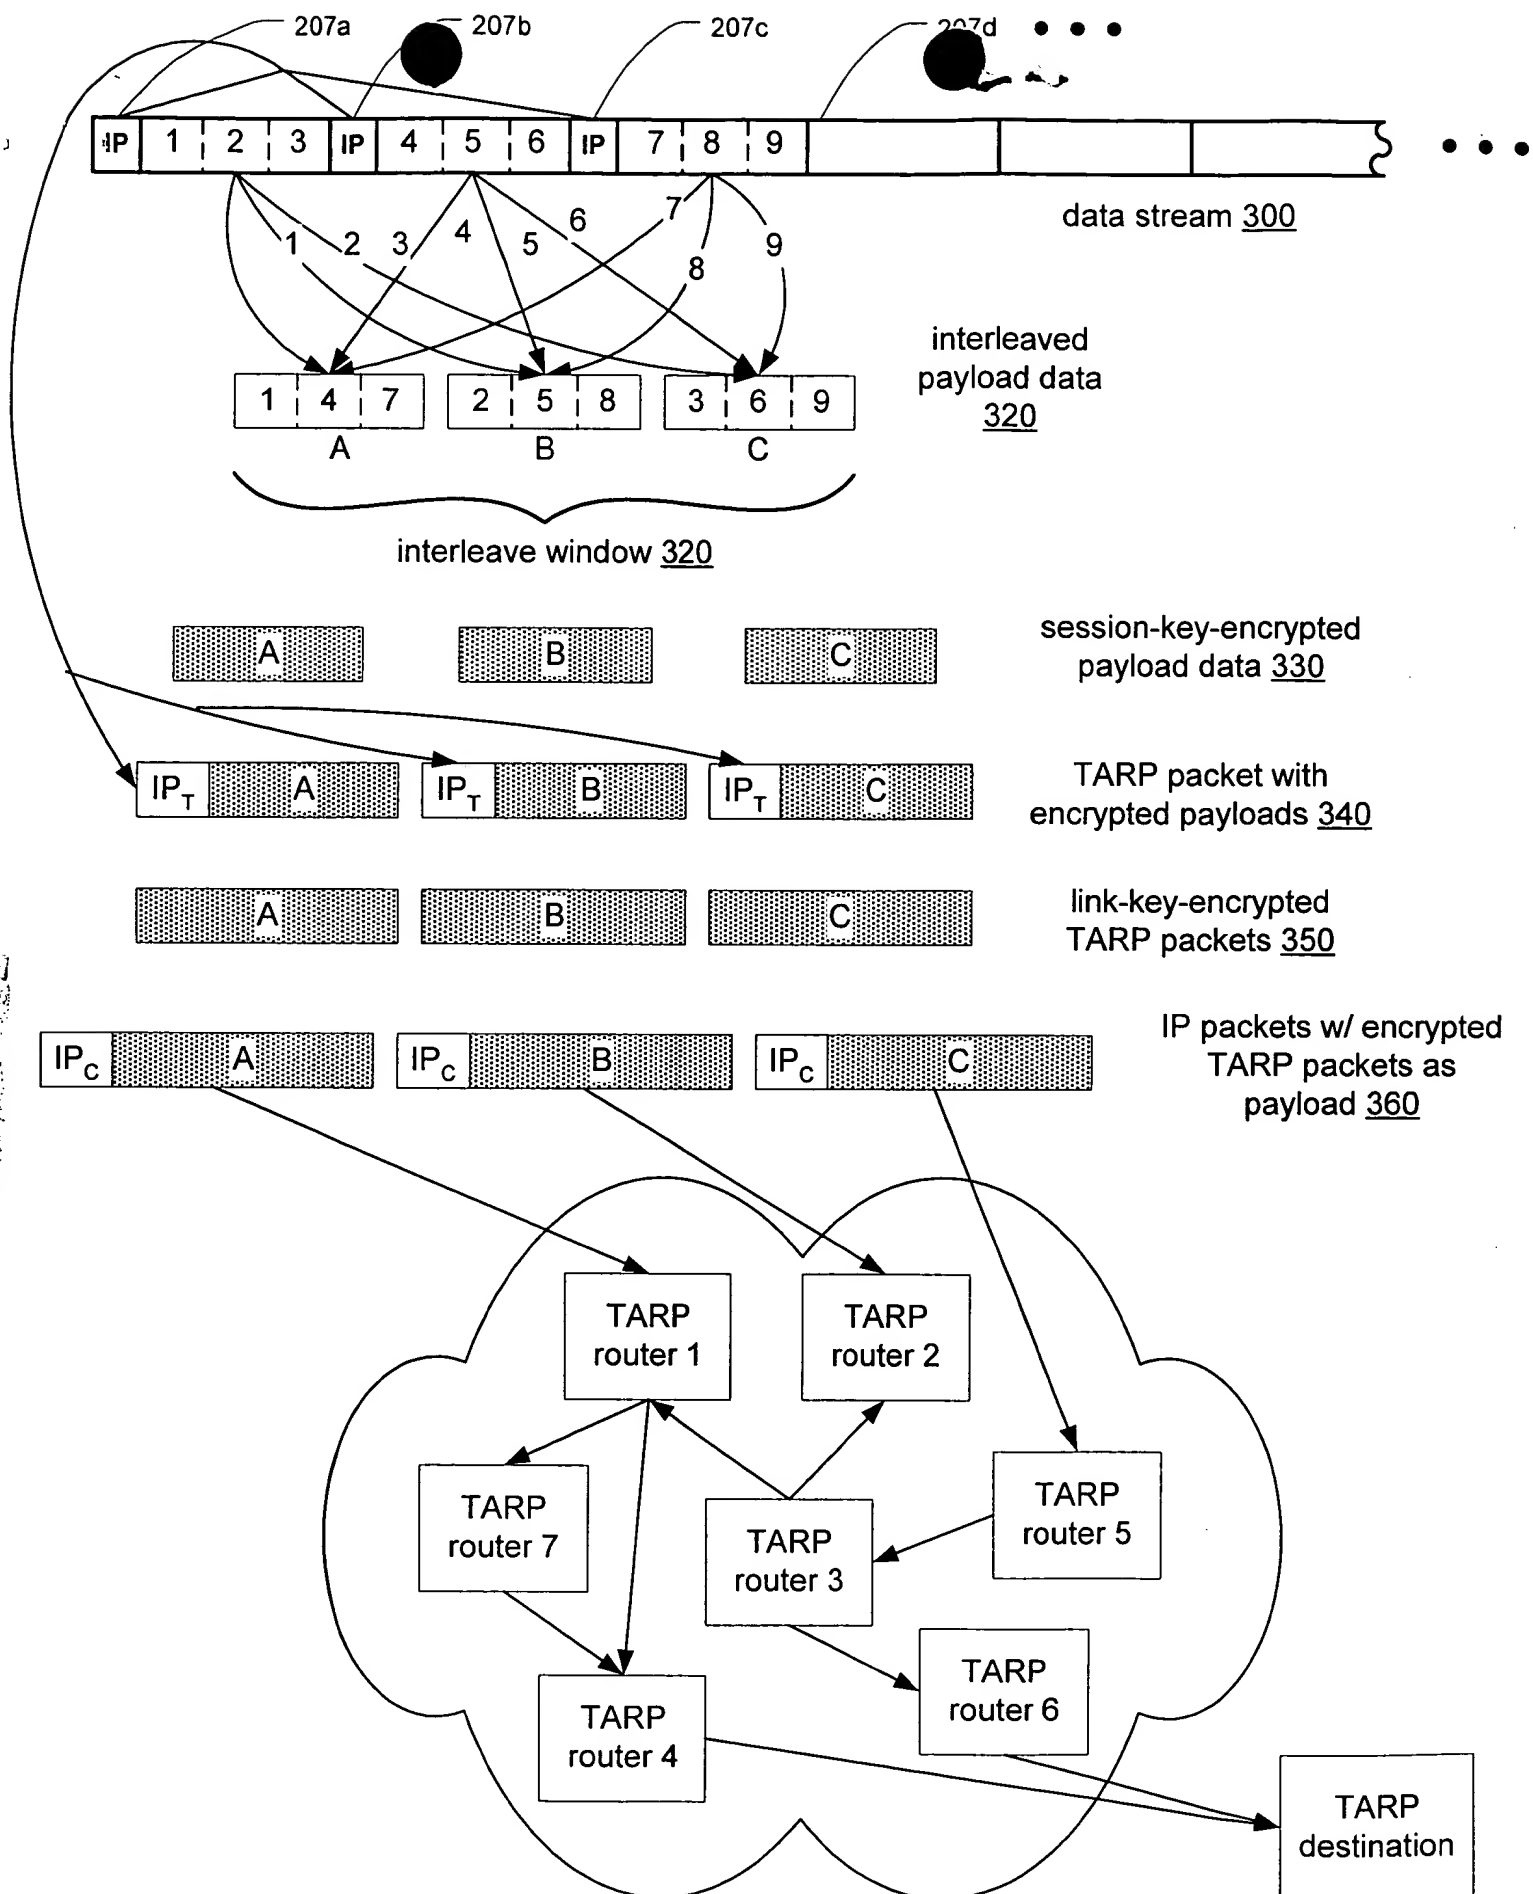


Fig. 3a

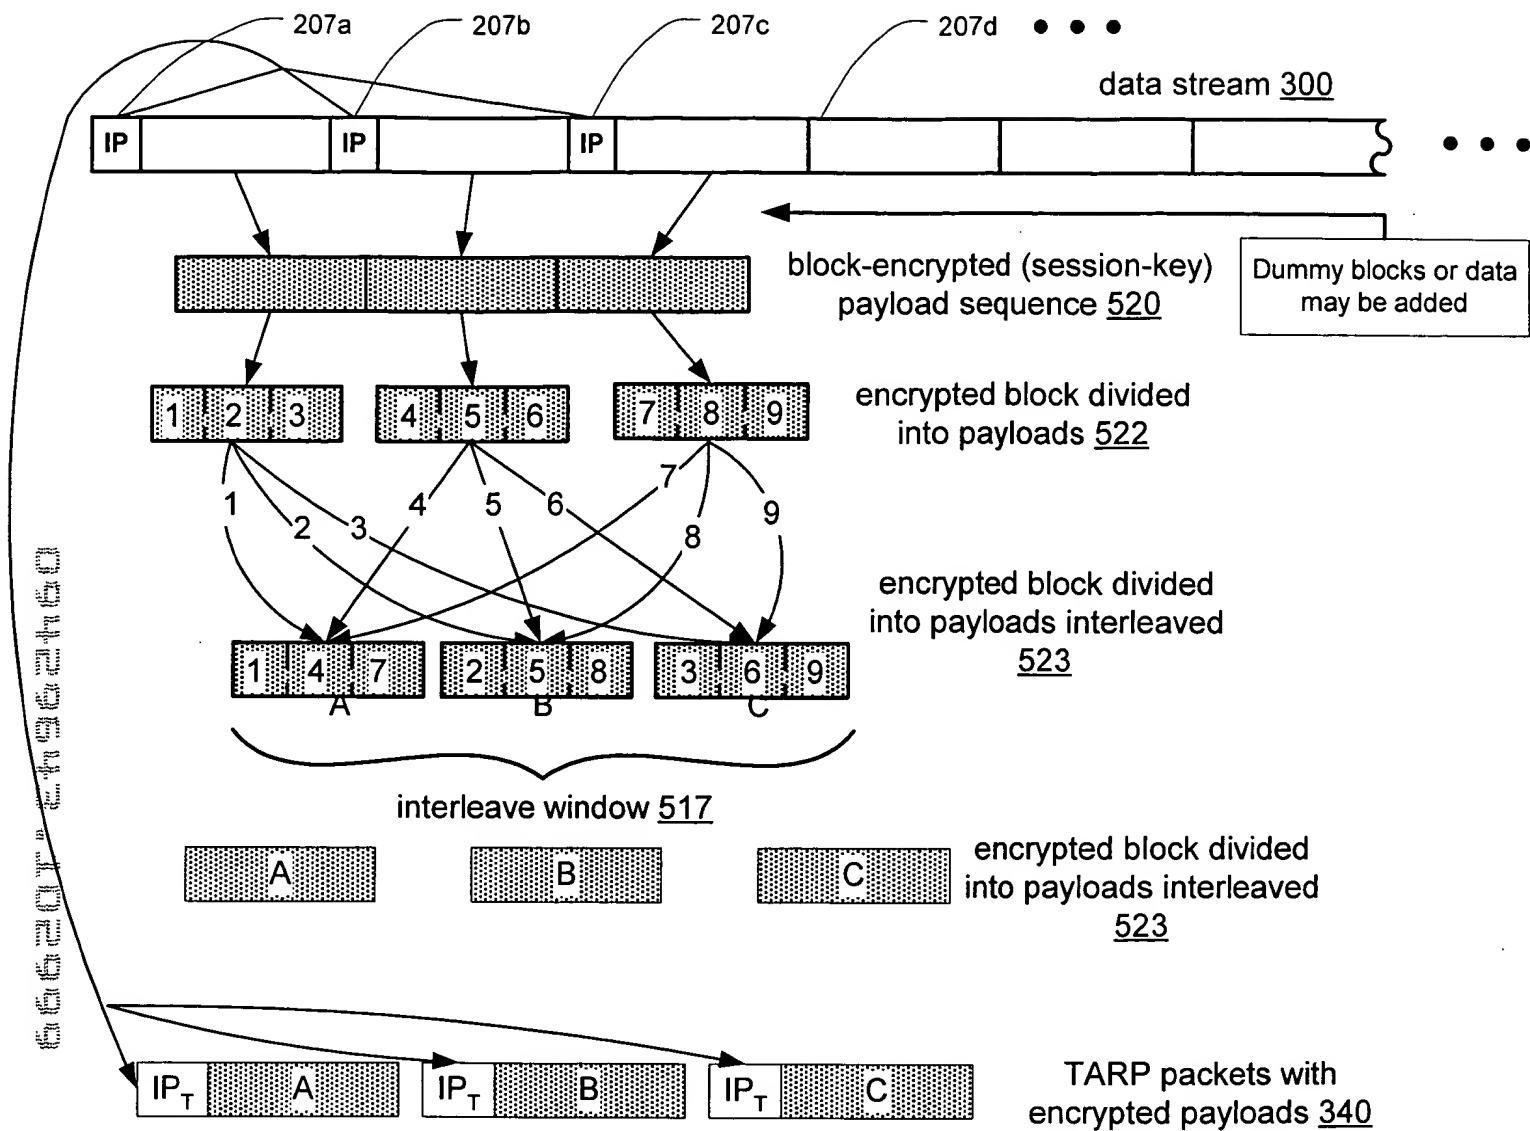


Fig. 3b

66207-24962460

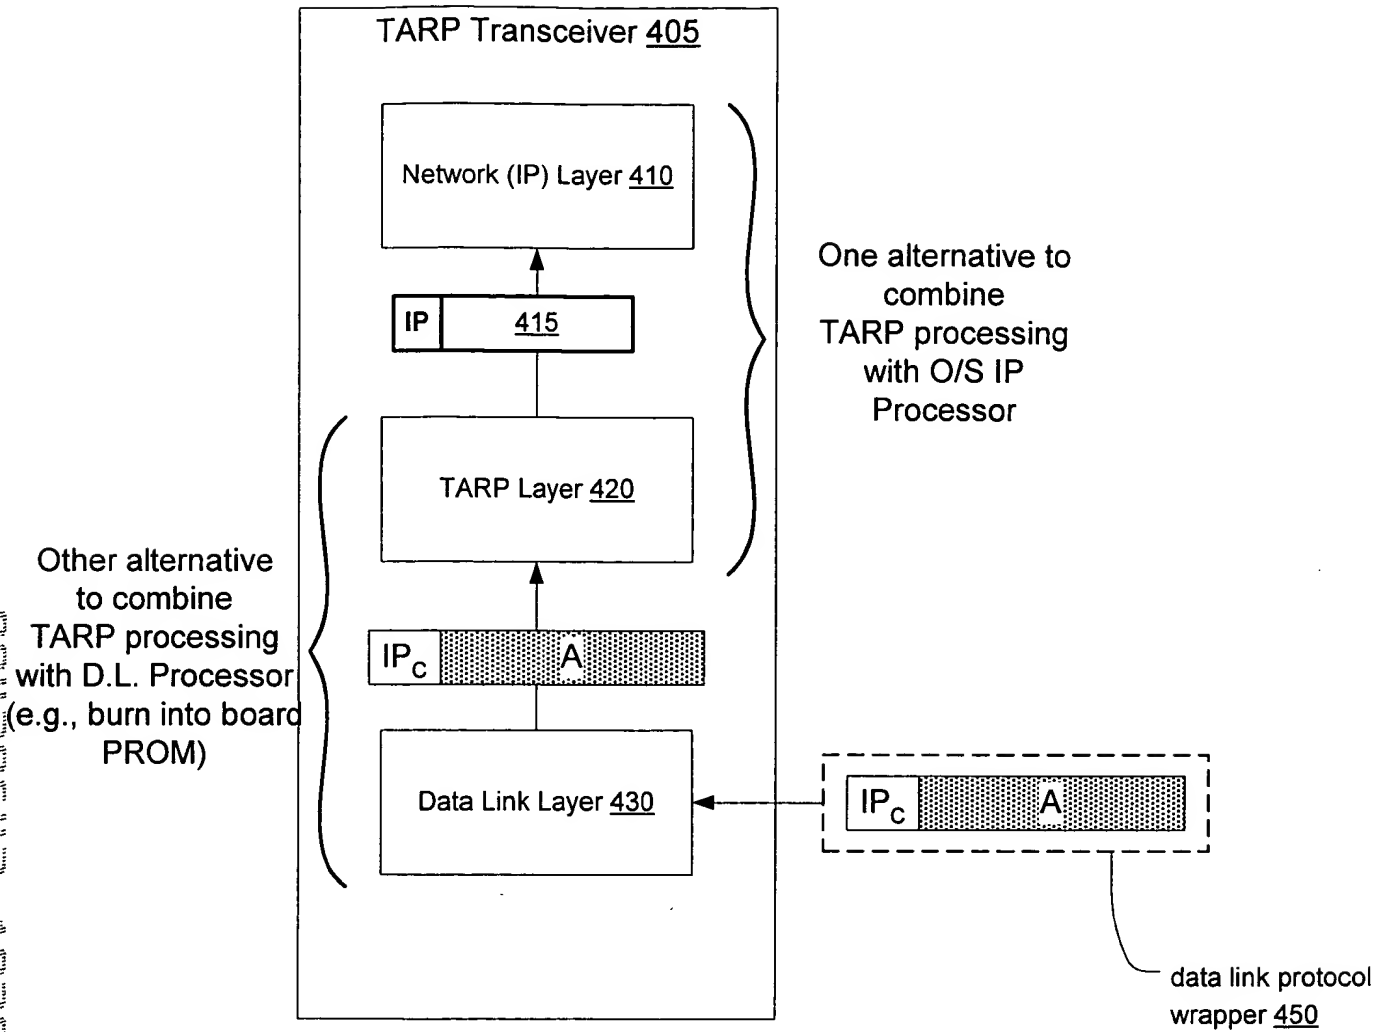


Fig. 4

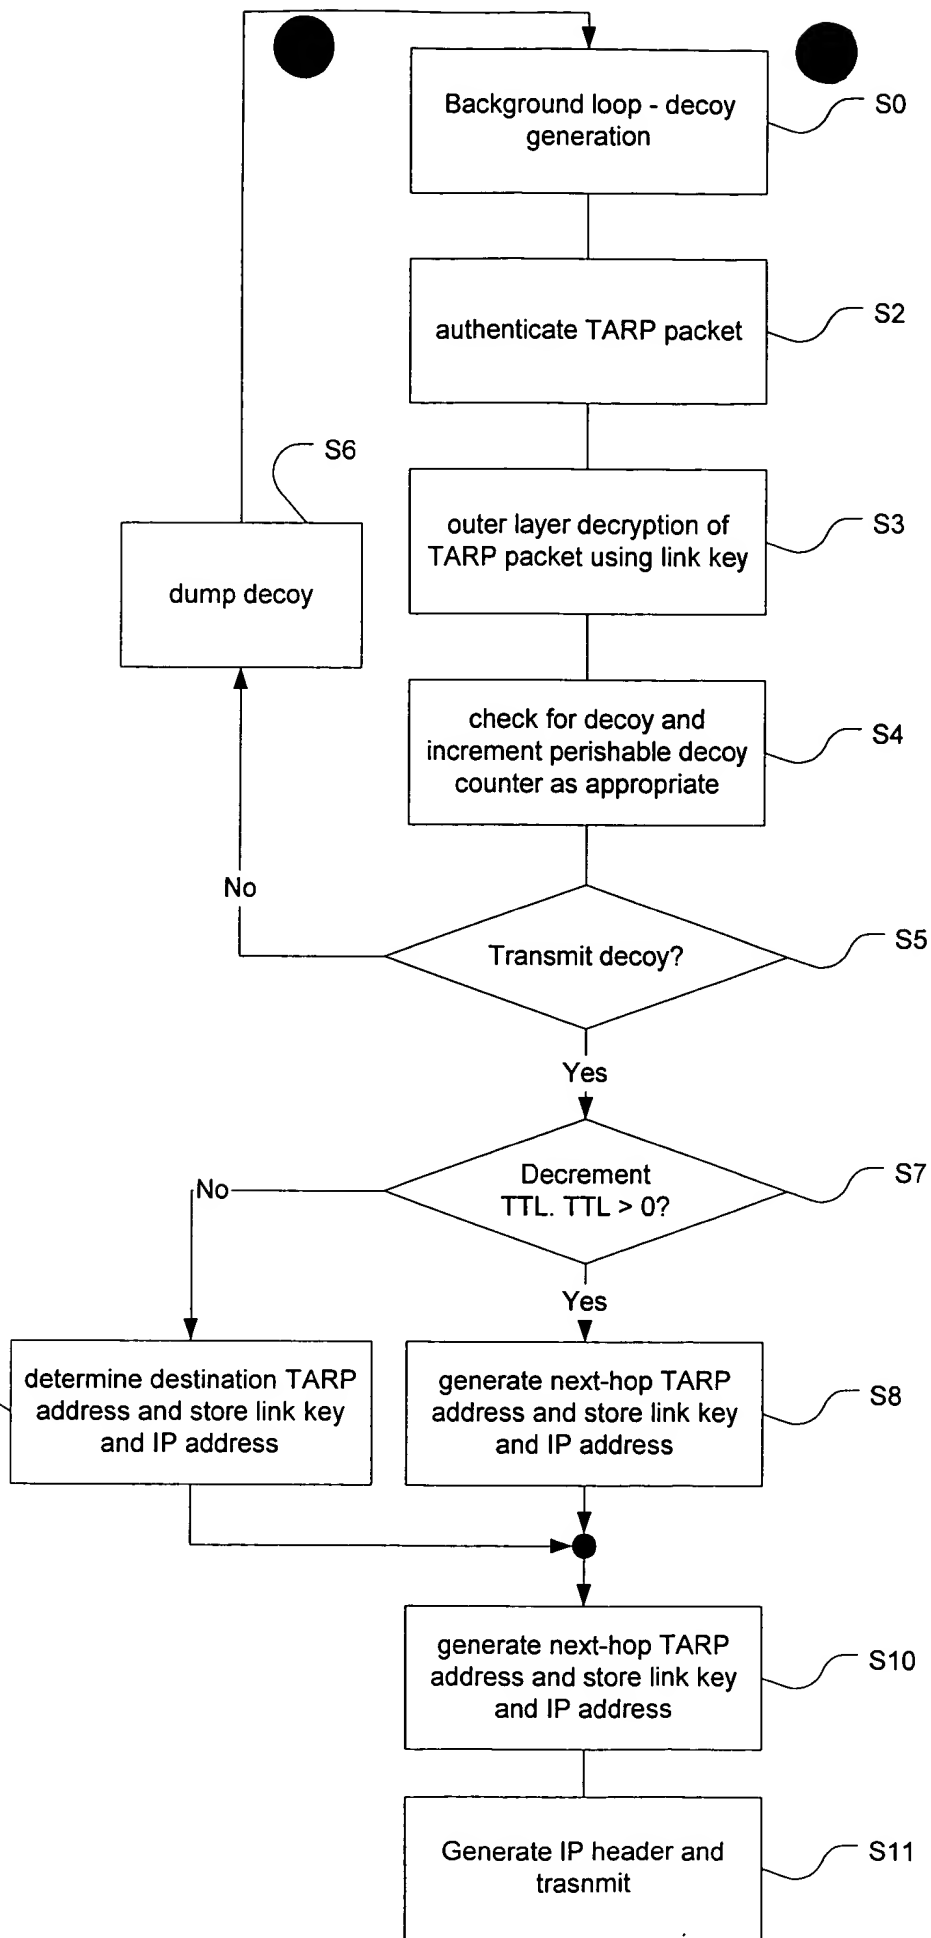


Fig. 5

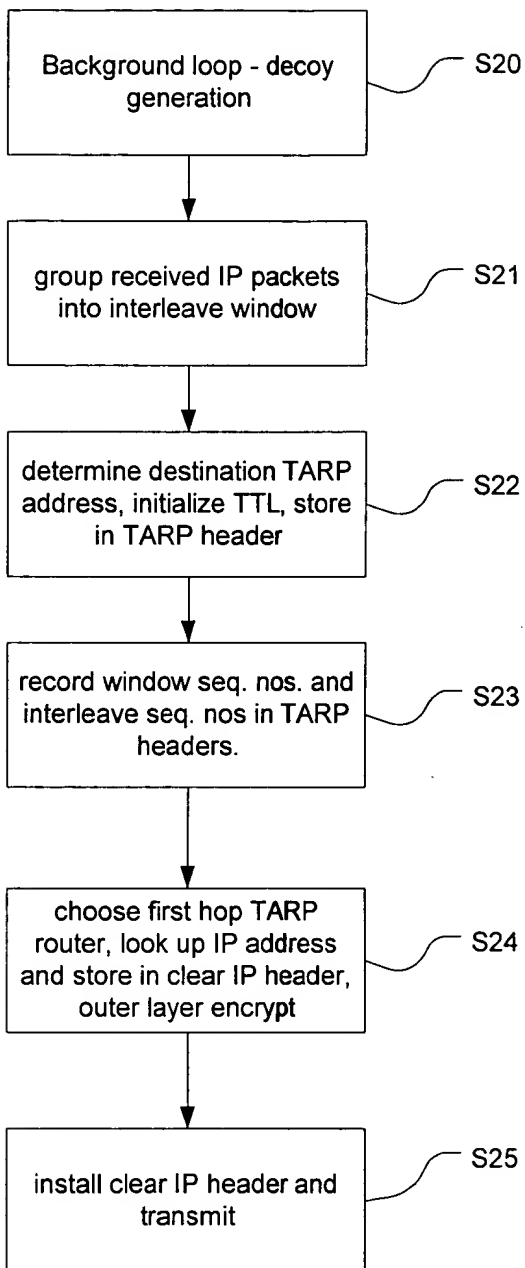


Fig. 6

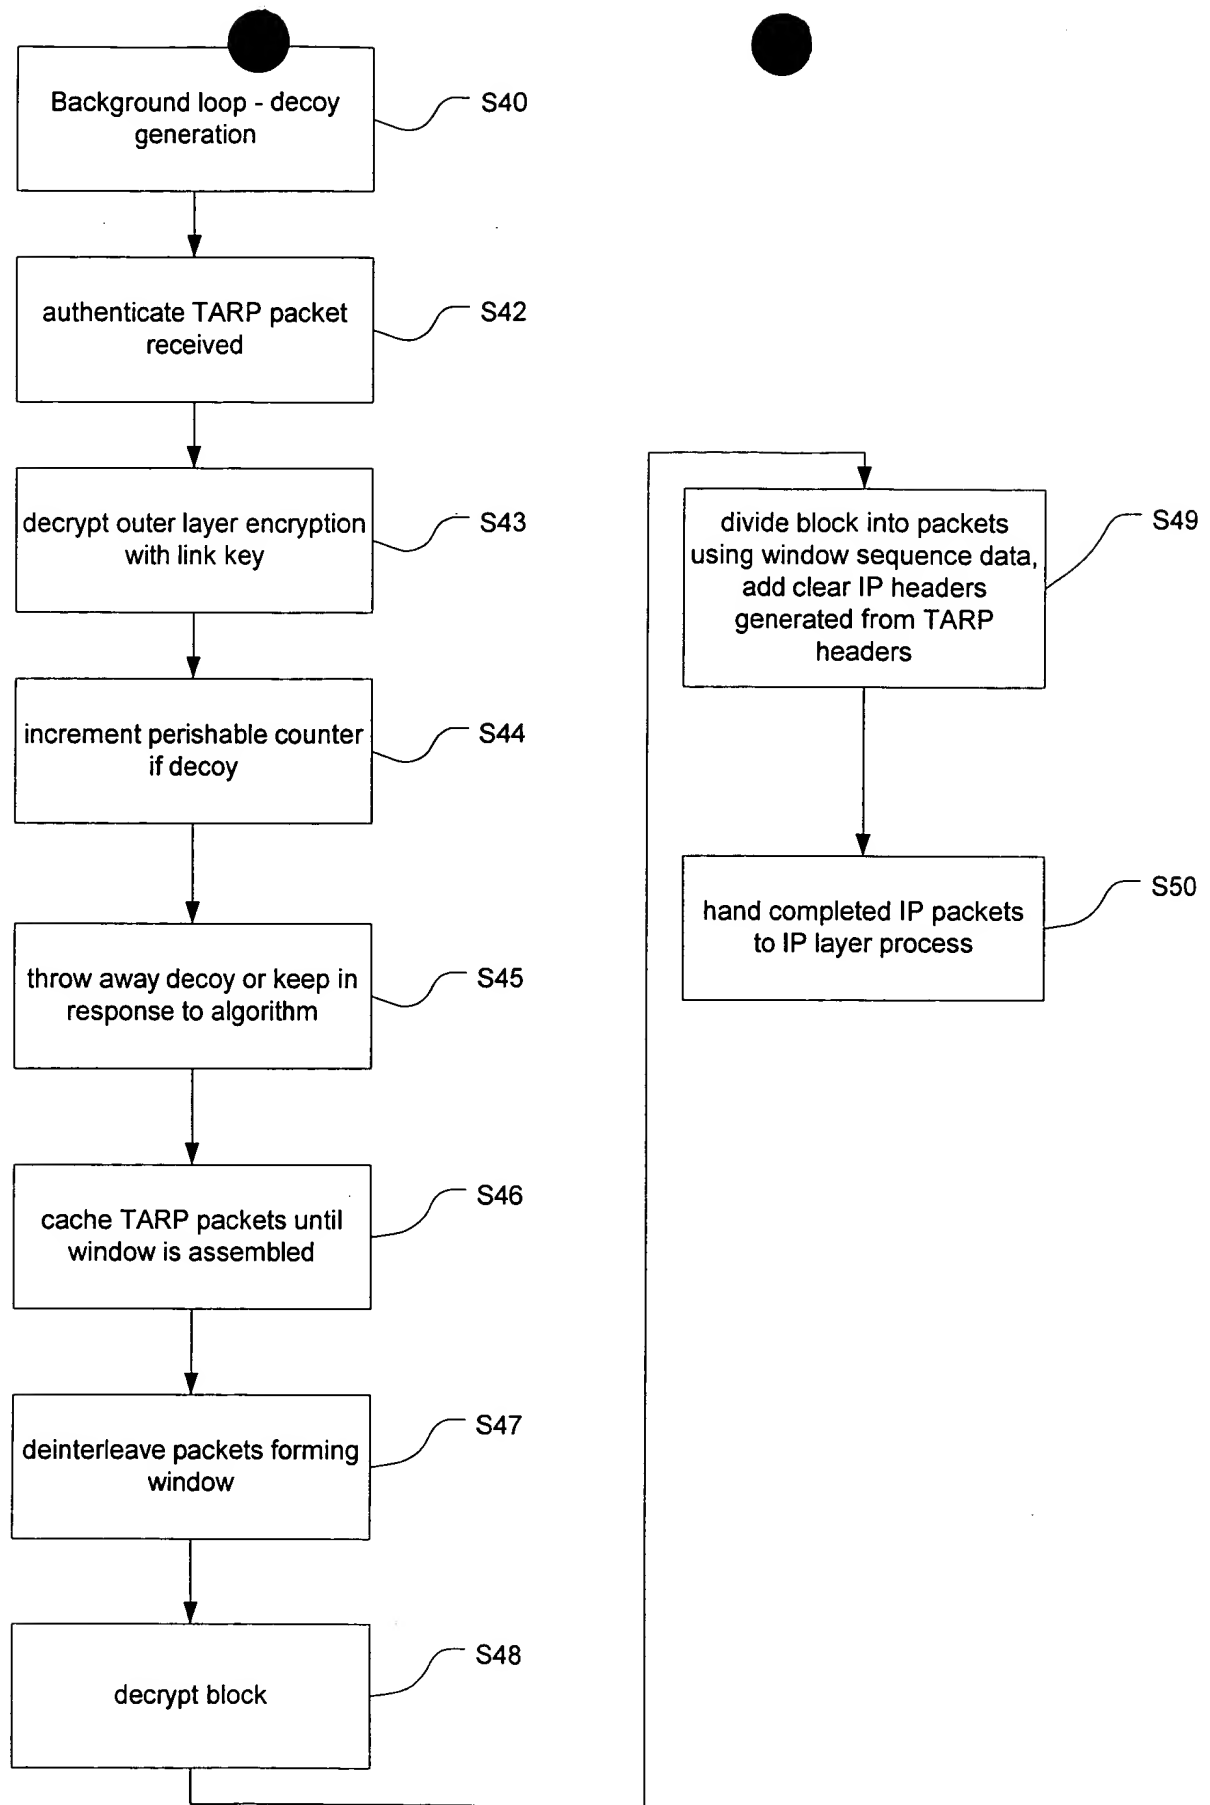


Fig. 7

Secure Session Establishment and Synchronization

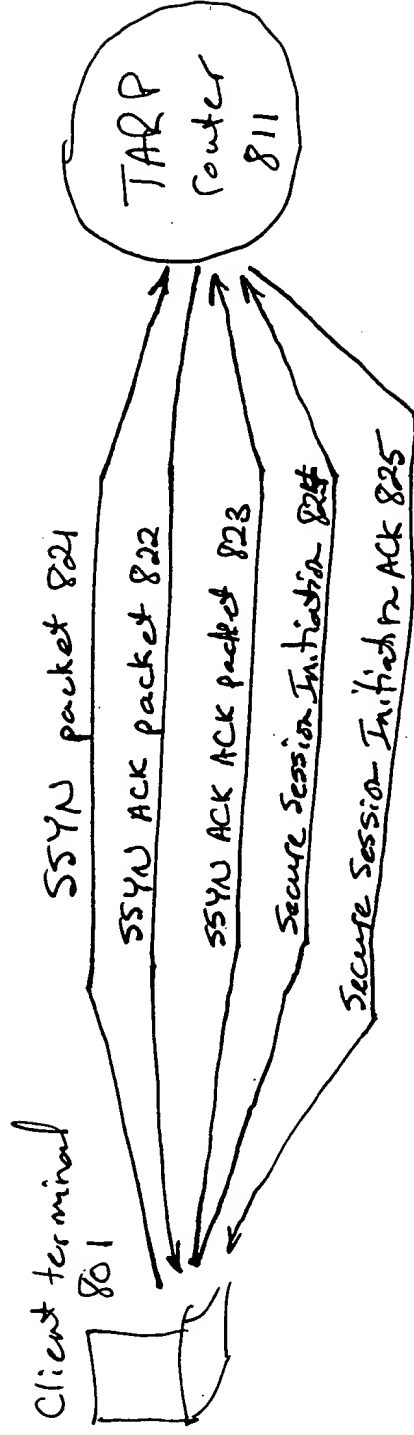


Fig 8.

Physical Link Redundancy

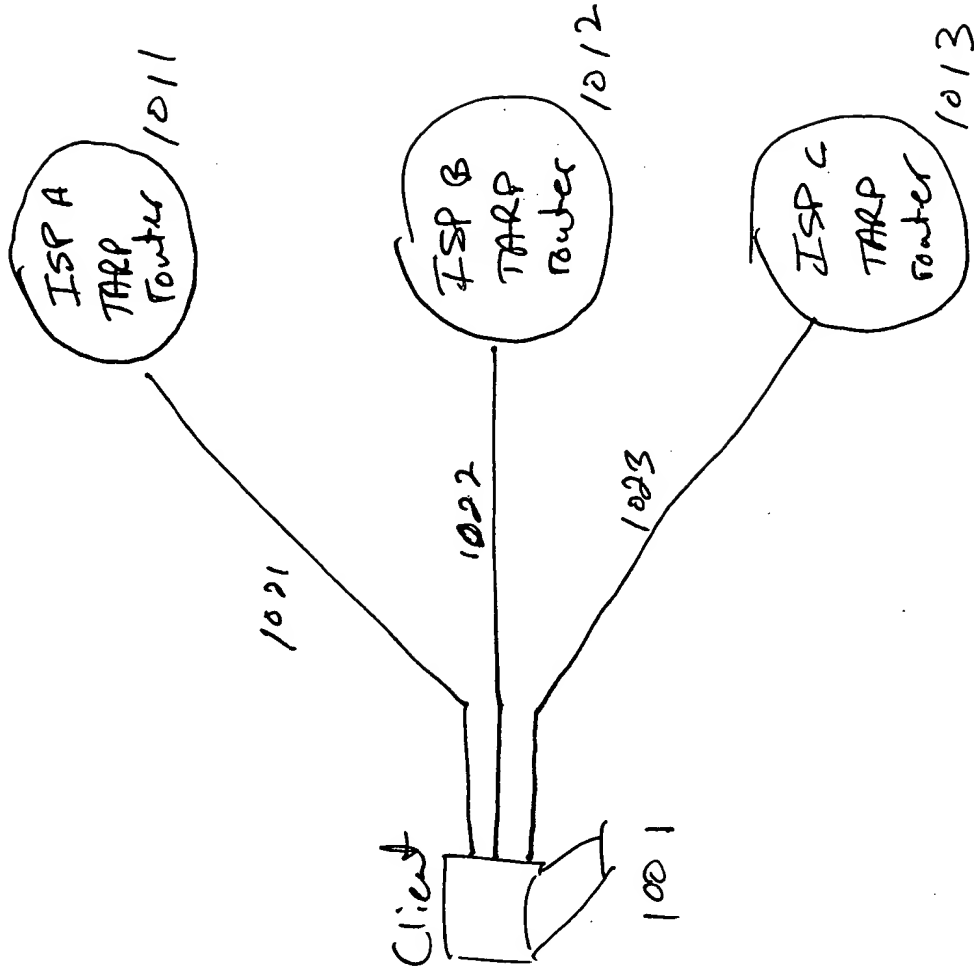


Fig 10

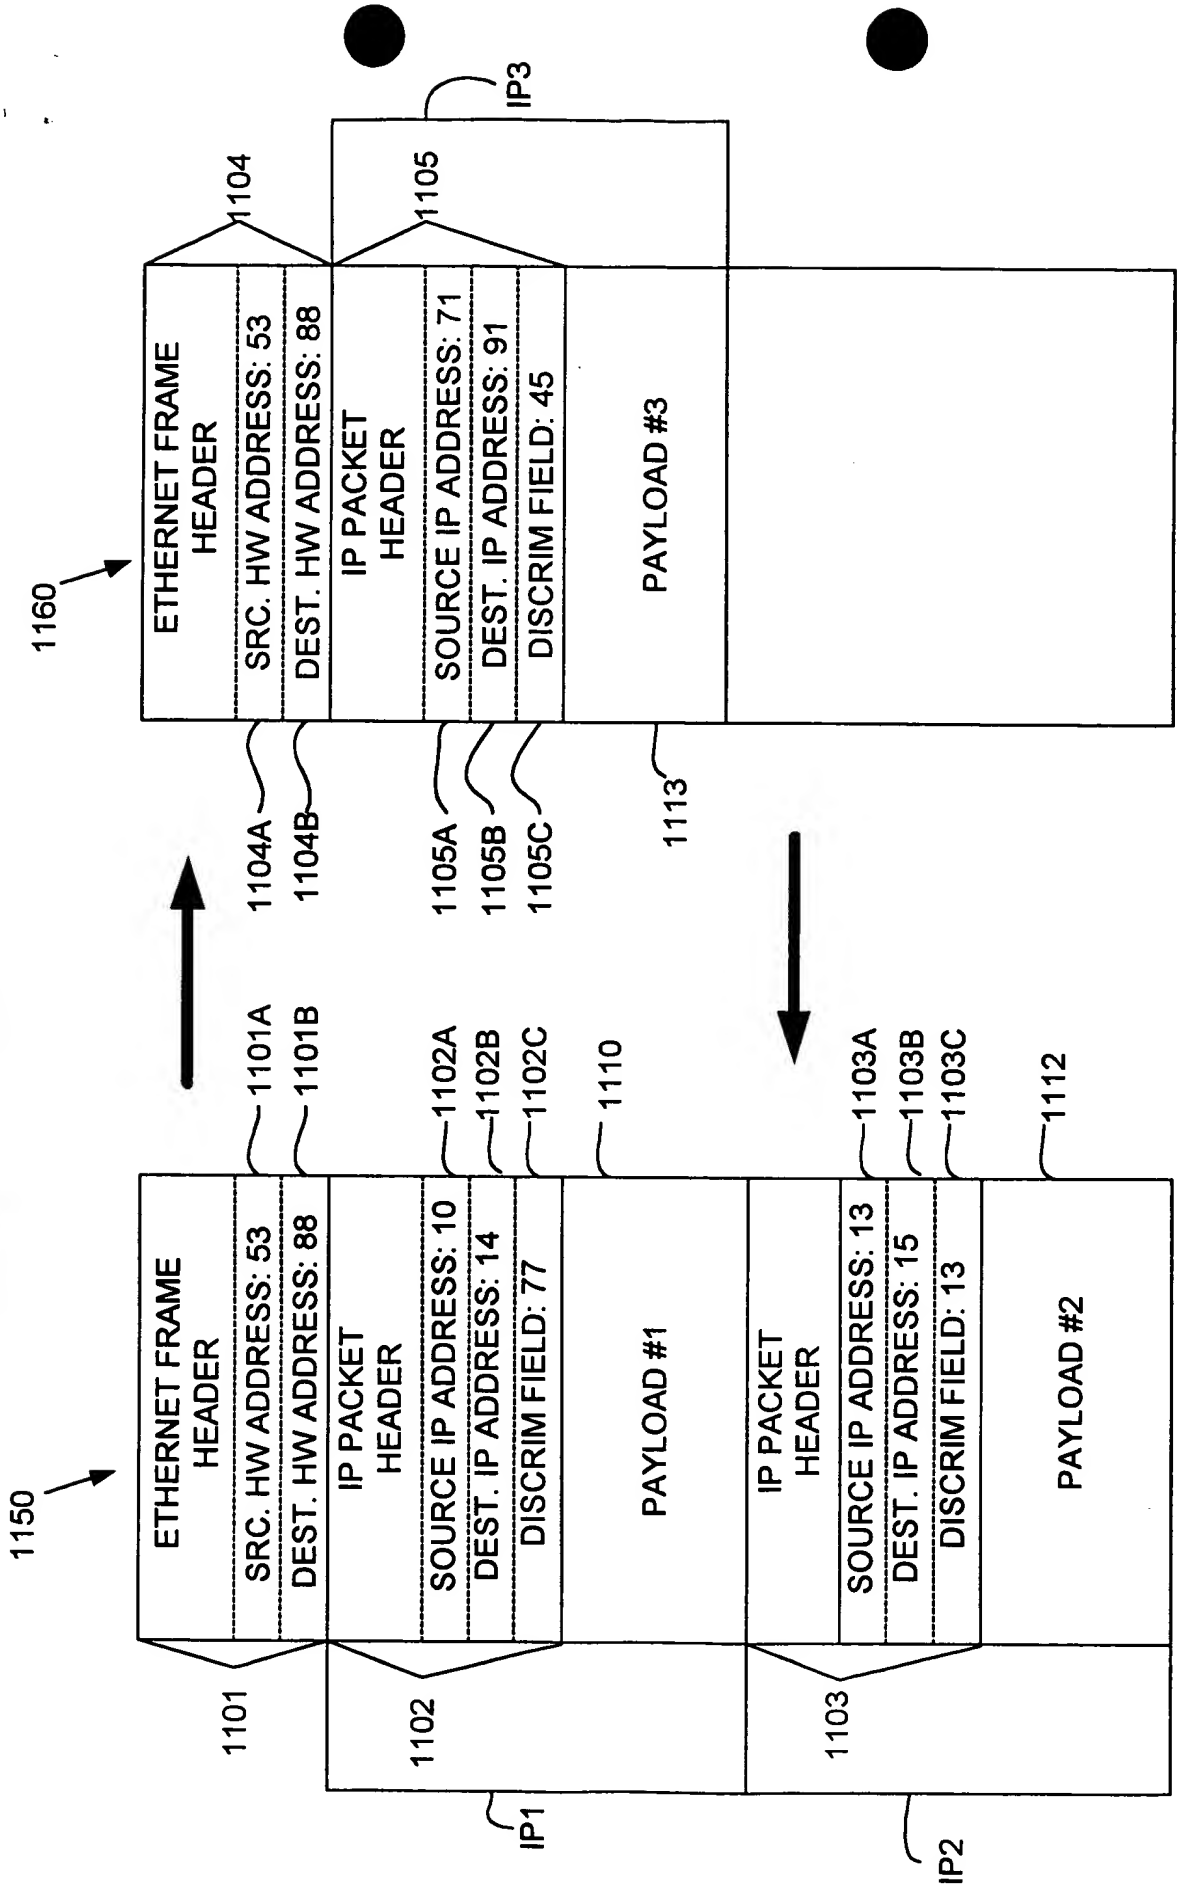


FIG. 11

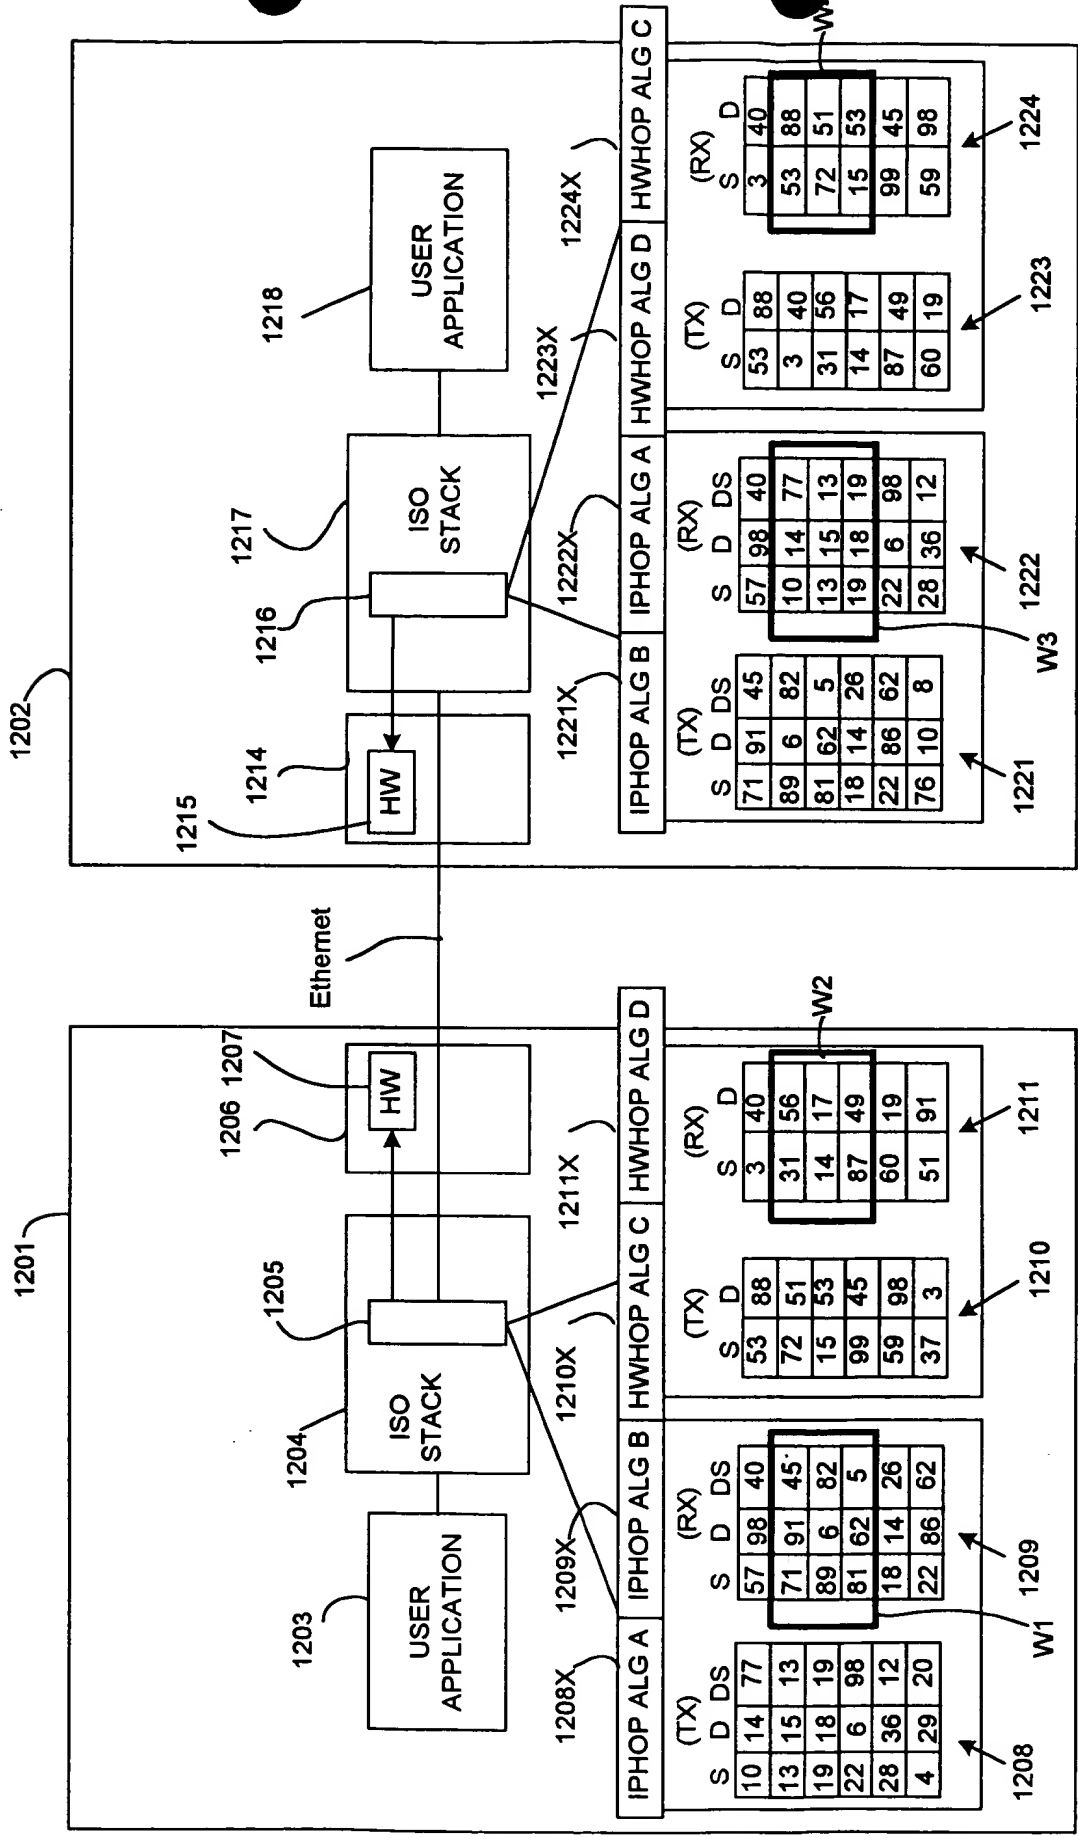


FIG. 12A

MODE OR EMBODIMENT	HARDWARE ADDRESSES	IP ADDRESSES	DISCRIMINATOR FIELD VALUES
1. PROMISCUOUS	SAME FOR ALL NODES OR COMPLETELY RANDOM	CAN BE VARIED IN SYNC	CAN BE VARIED IN SYNC
2. PROMISCUOUS PER VPN	FIXED FOR EACH VPN	CAN BE VARIED IN SYNC	CAN BE VARIED IN SYNC
3. HARDWARE HOPPING	CAN BE VARIED IN SYNC	CAN BE VARIED IN SYNC	CAN BE VARIED IN SYNC

FIG. 12B

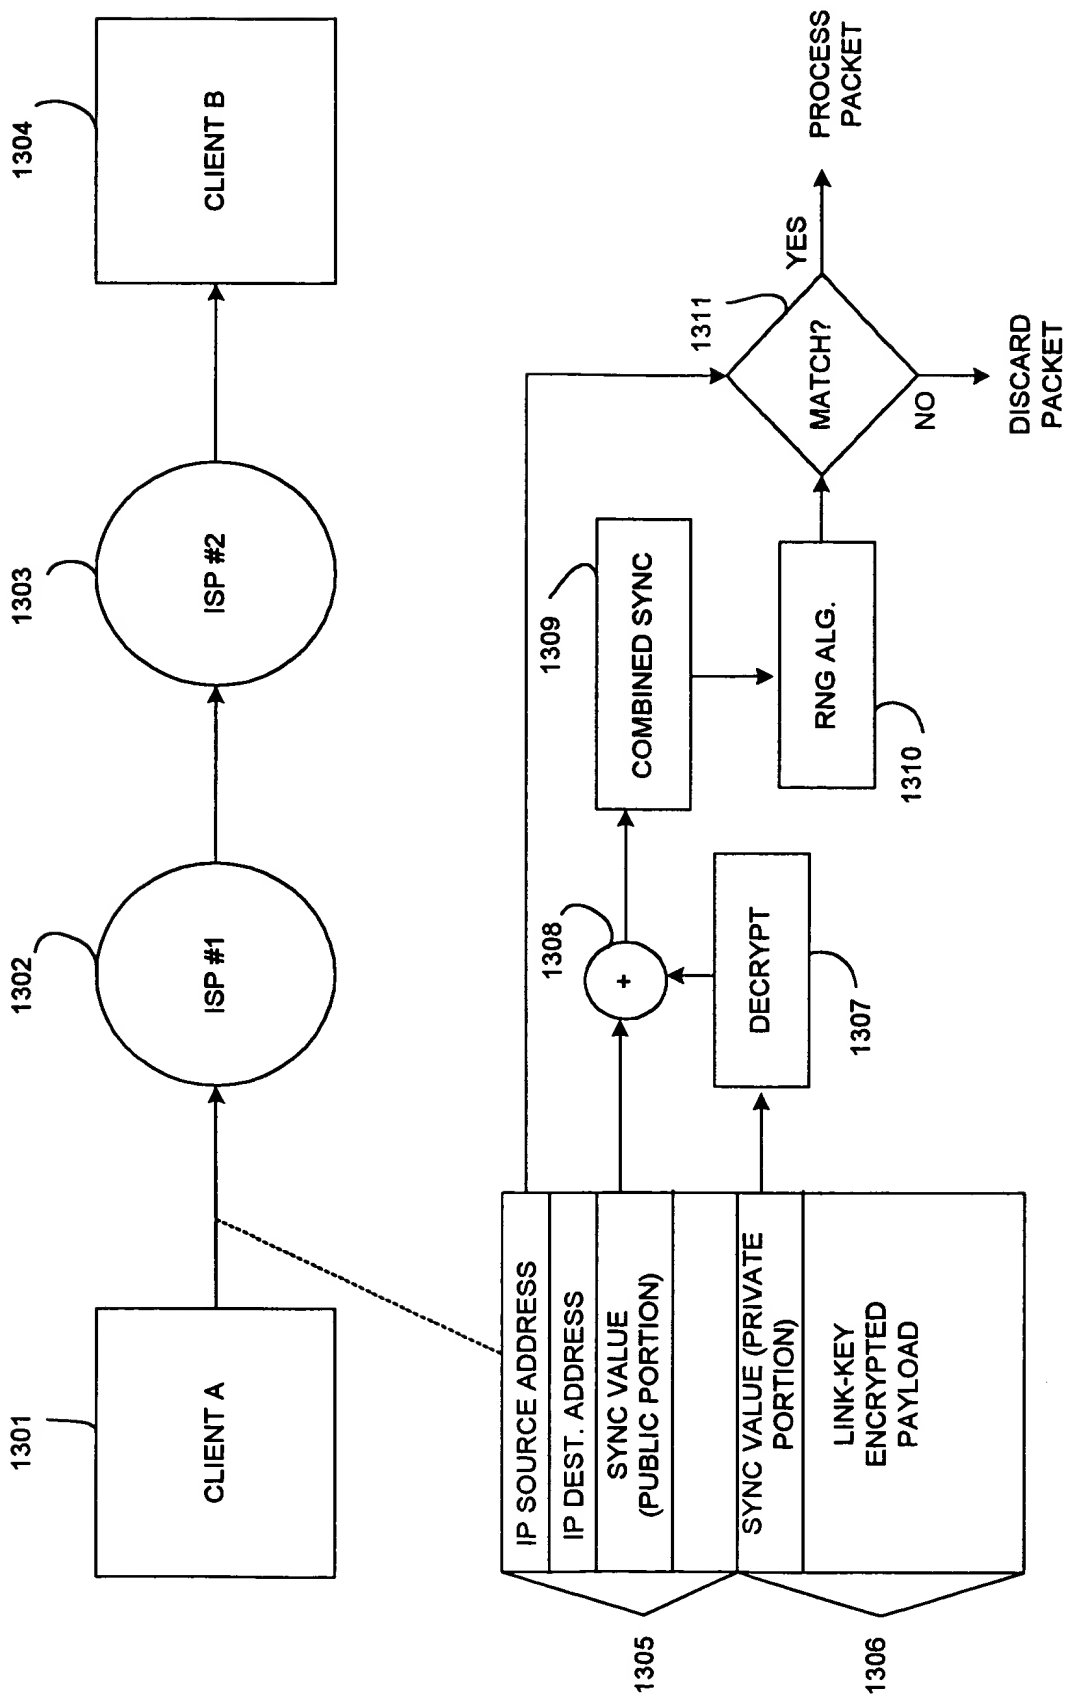


FIG. 13

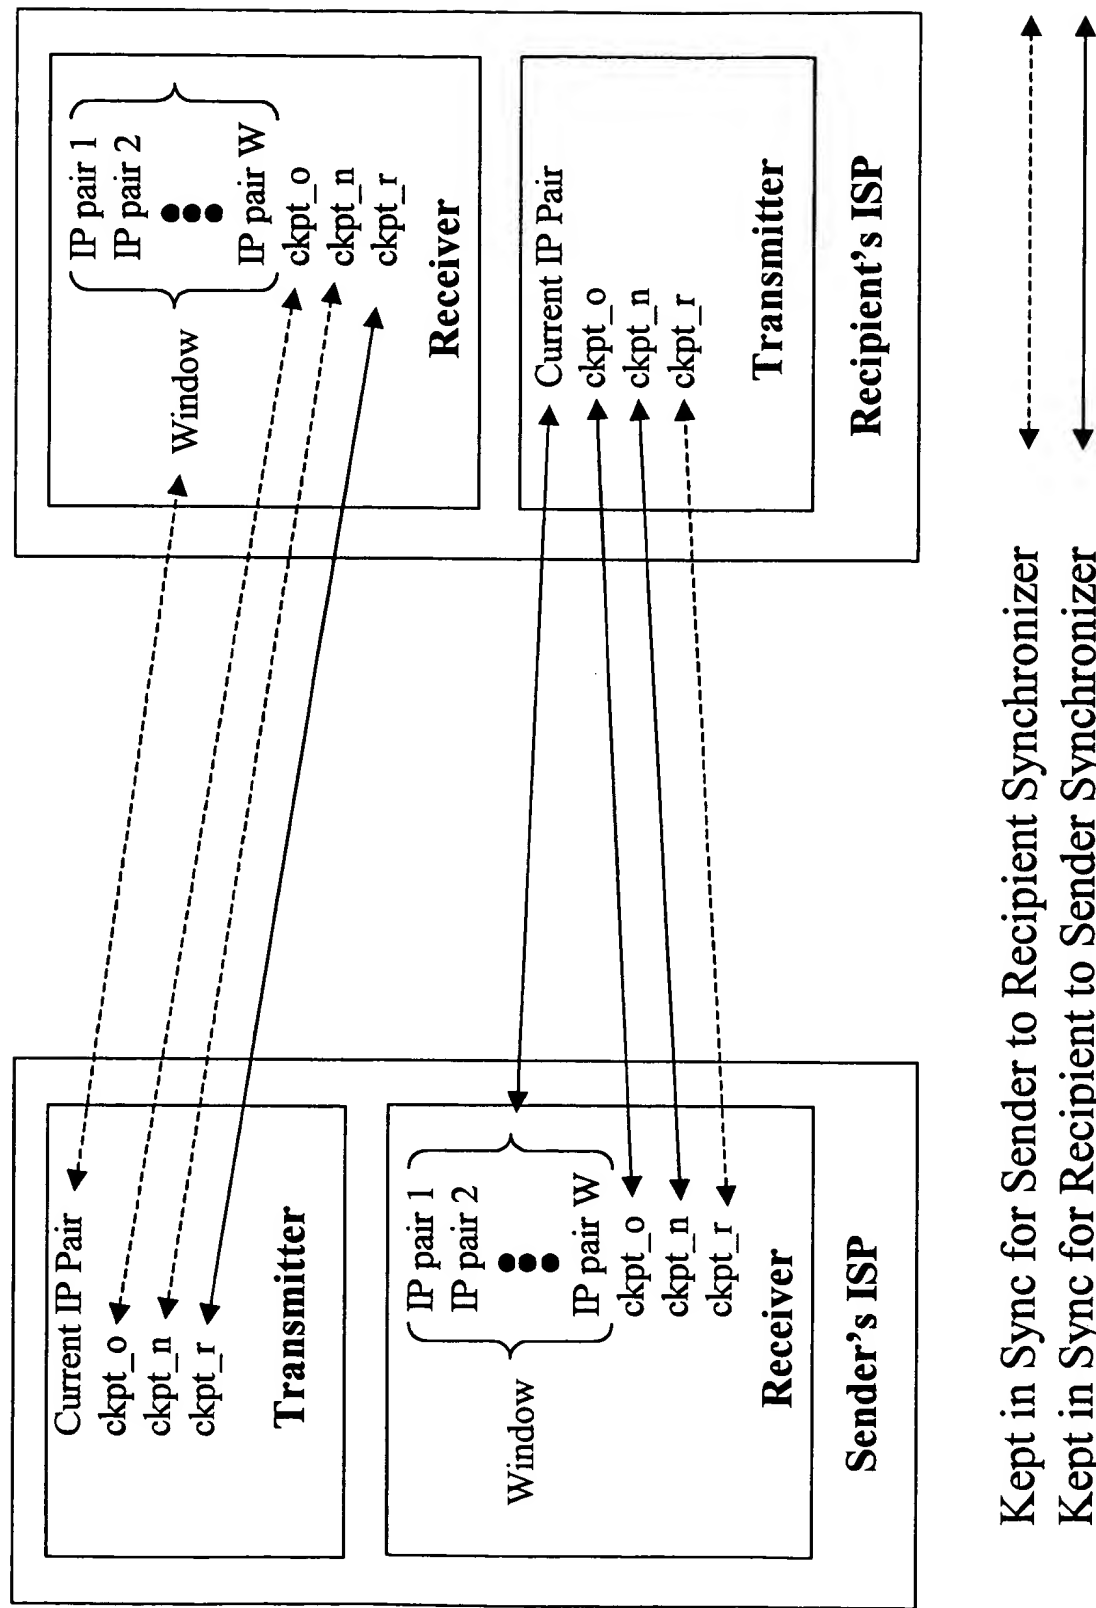


FIG. 14

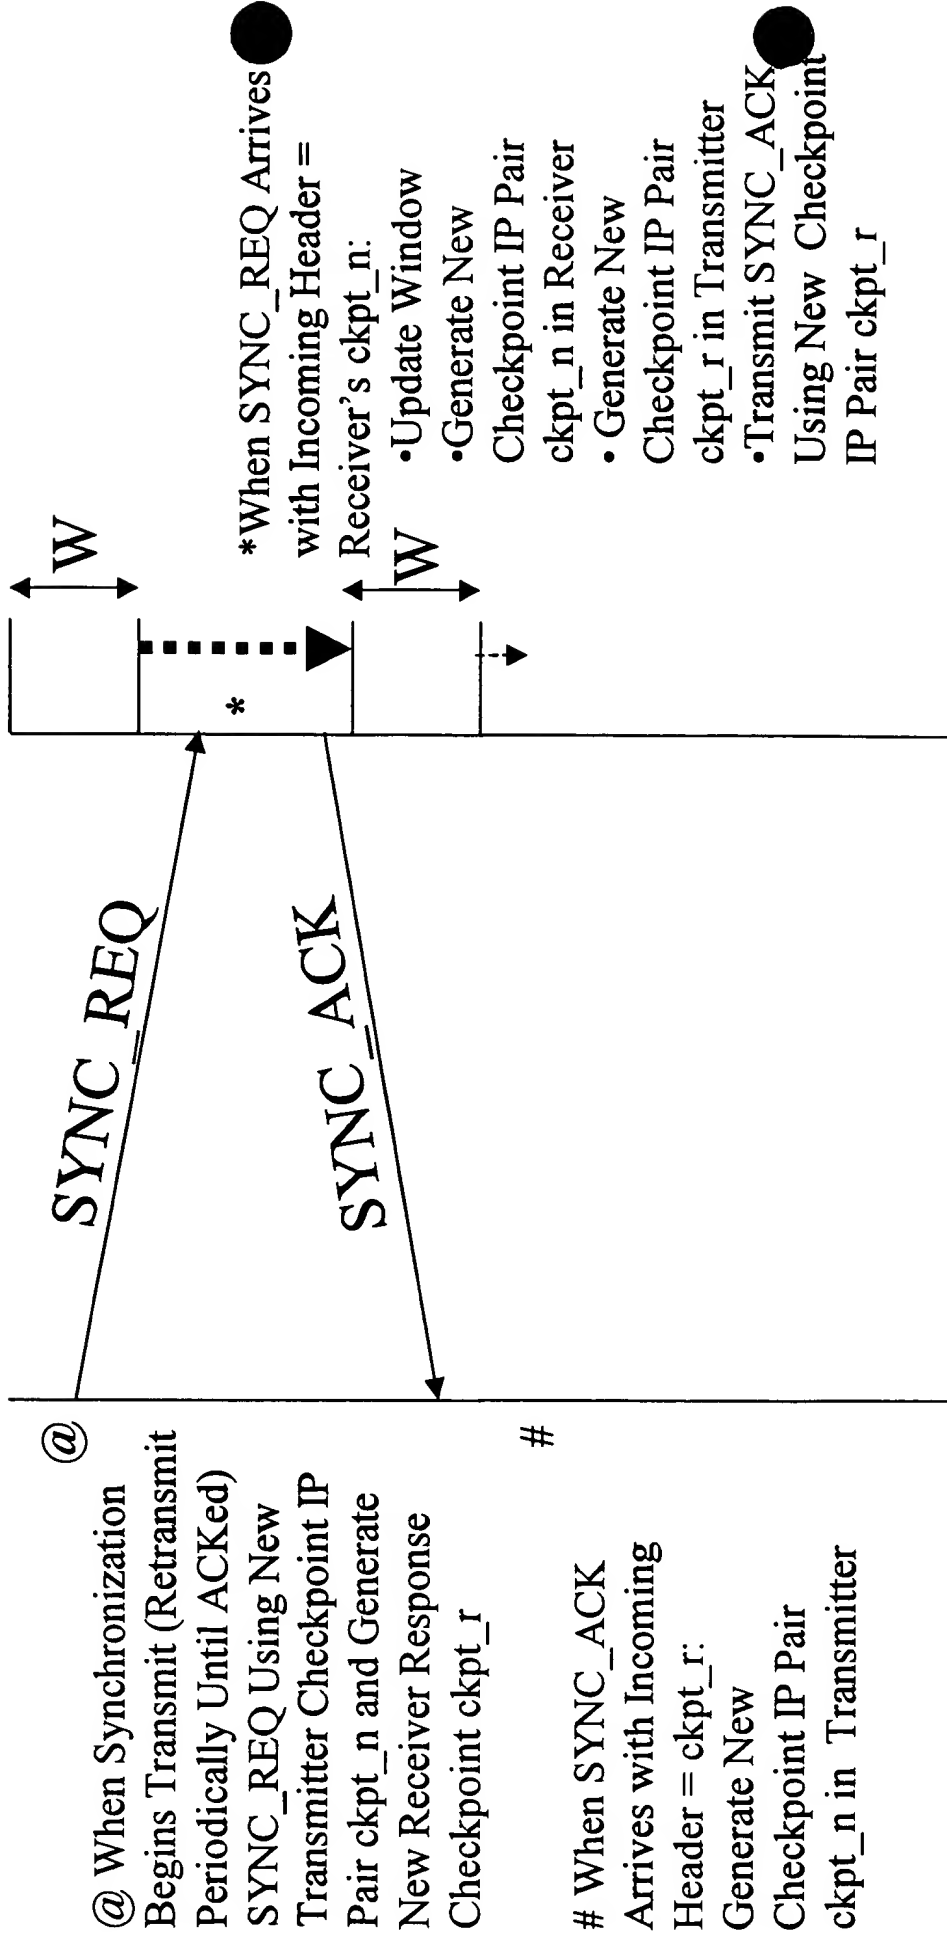


FIG. 15

(Ethernet Lan - Two A Address Blocks)

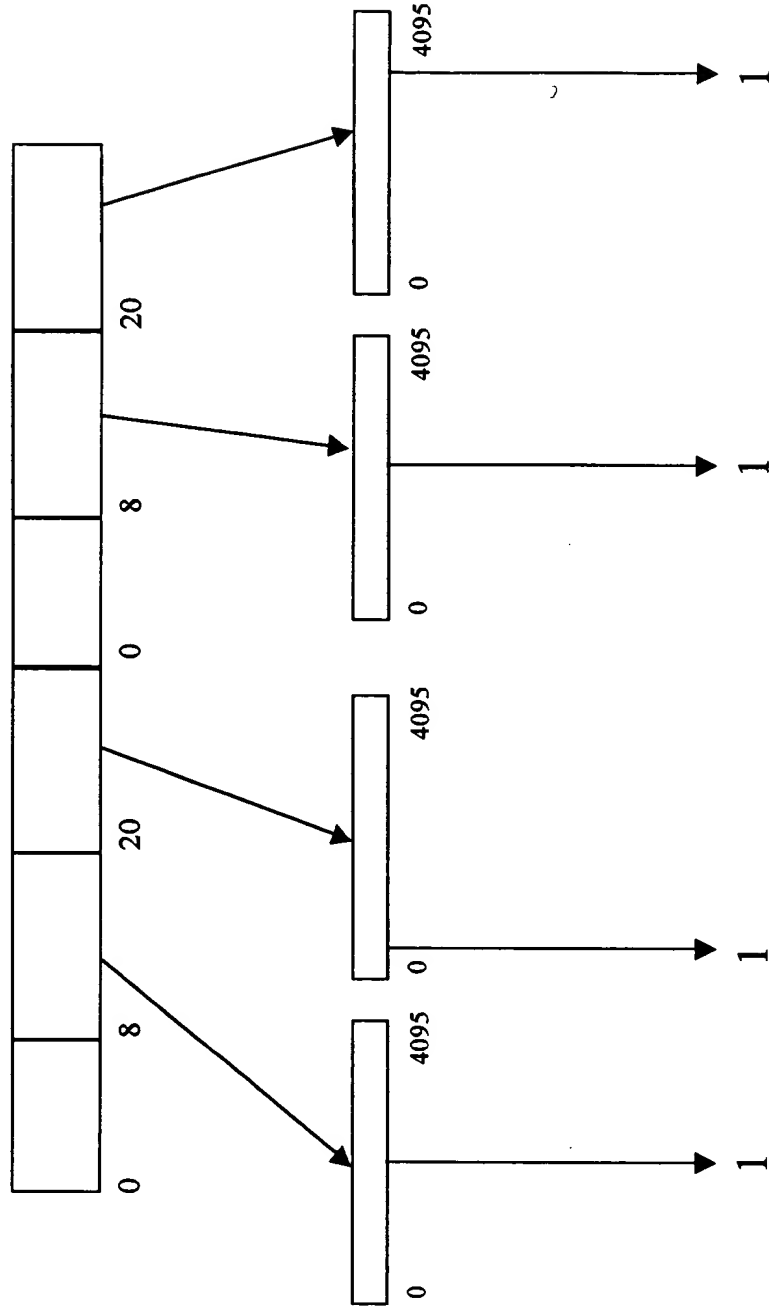


FIG. 16

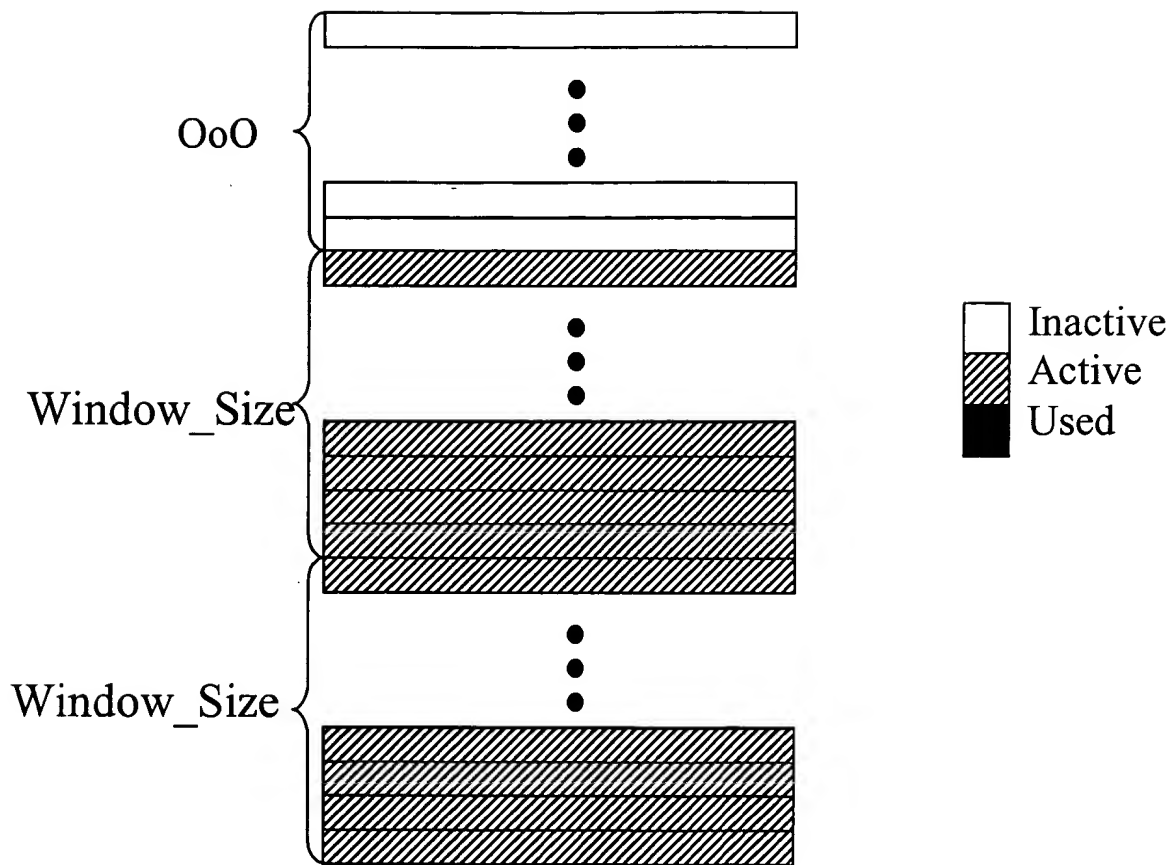


FIG. 17

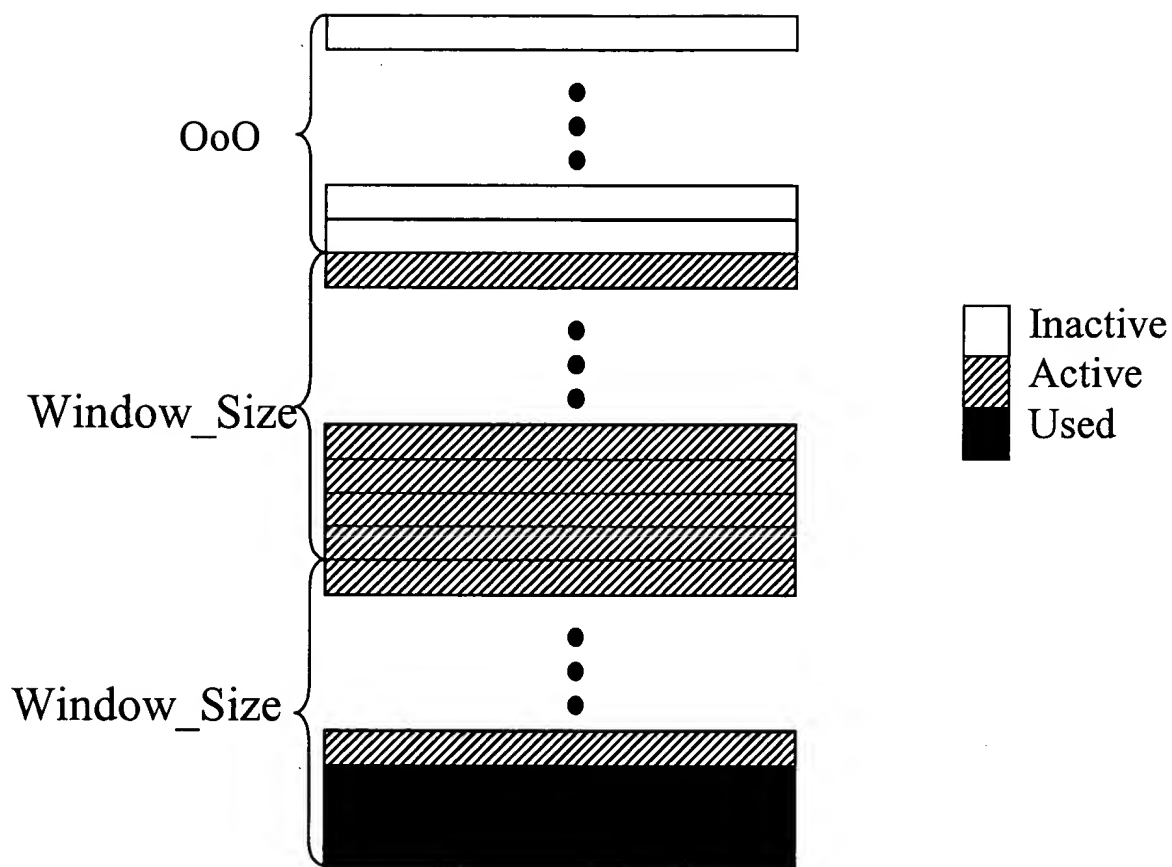


FIG. 18

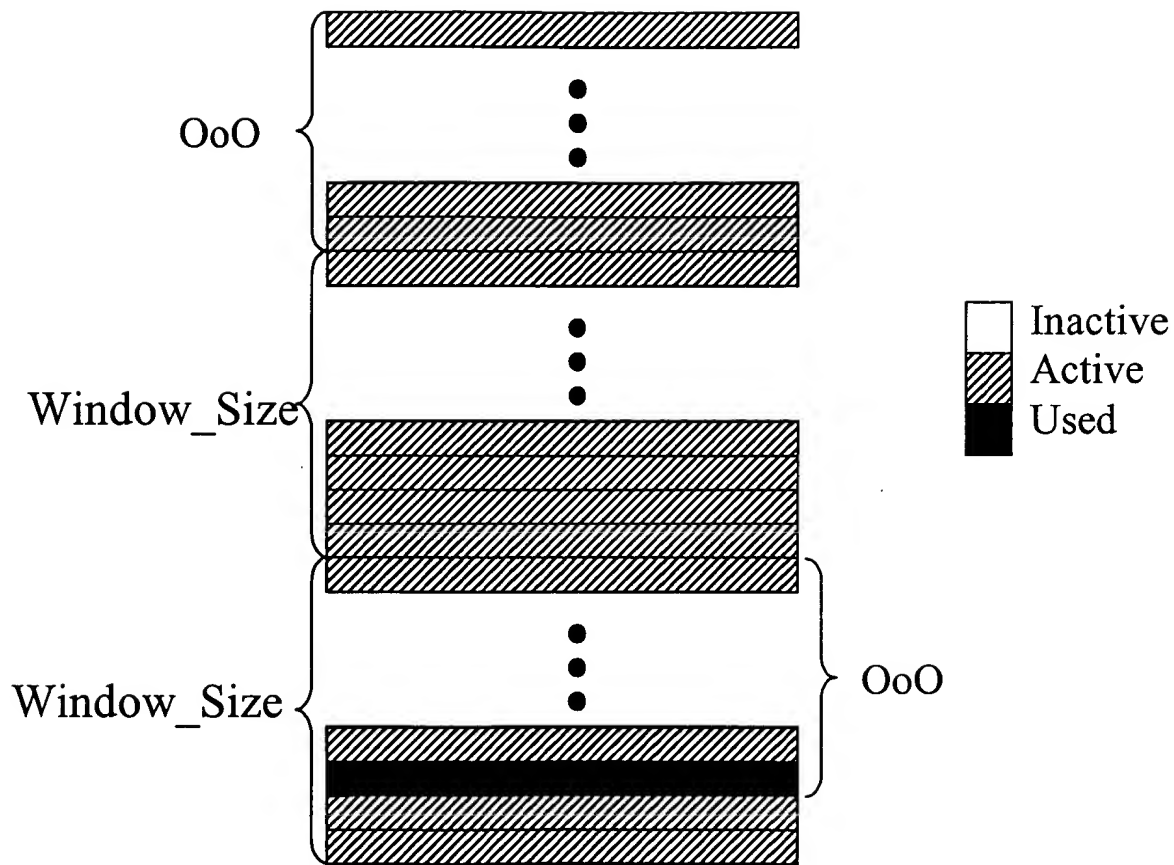


FIG. 19

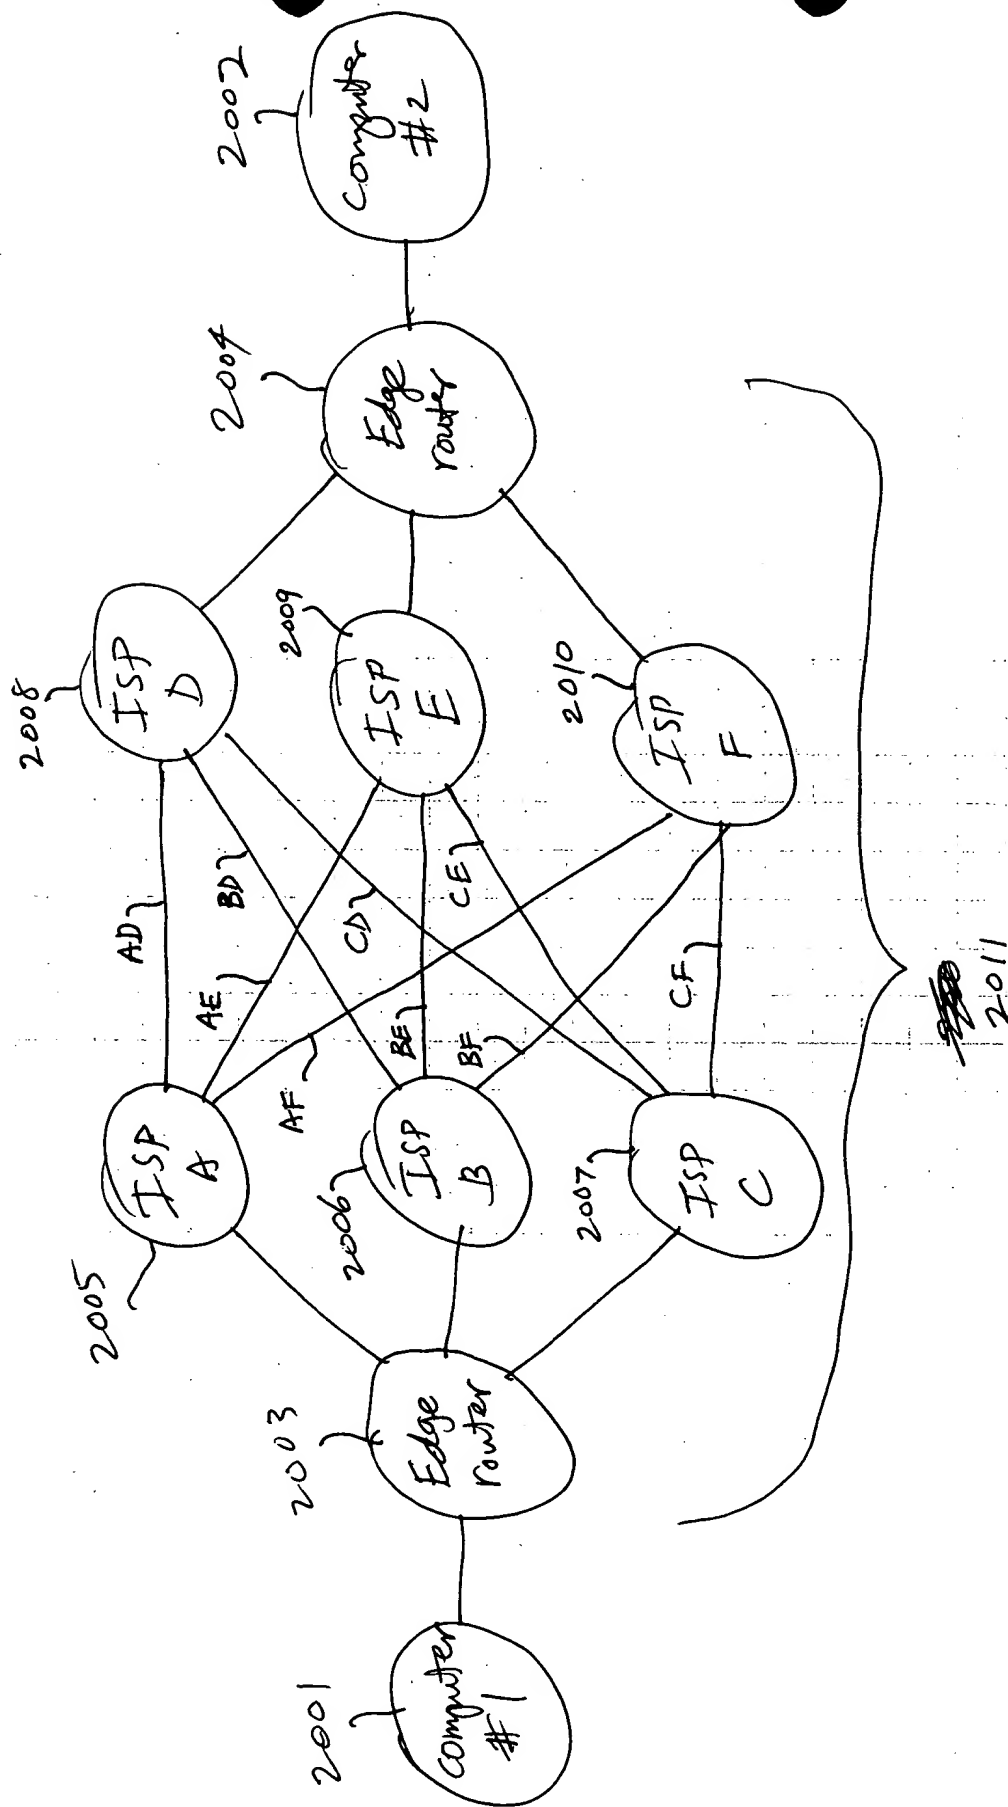


FIG. 20

66620T CH 262460

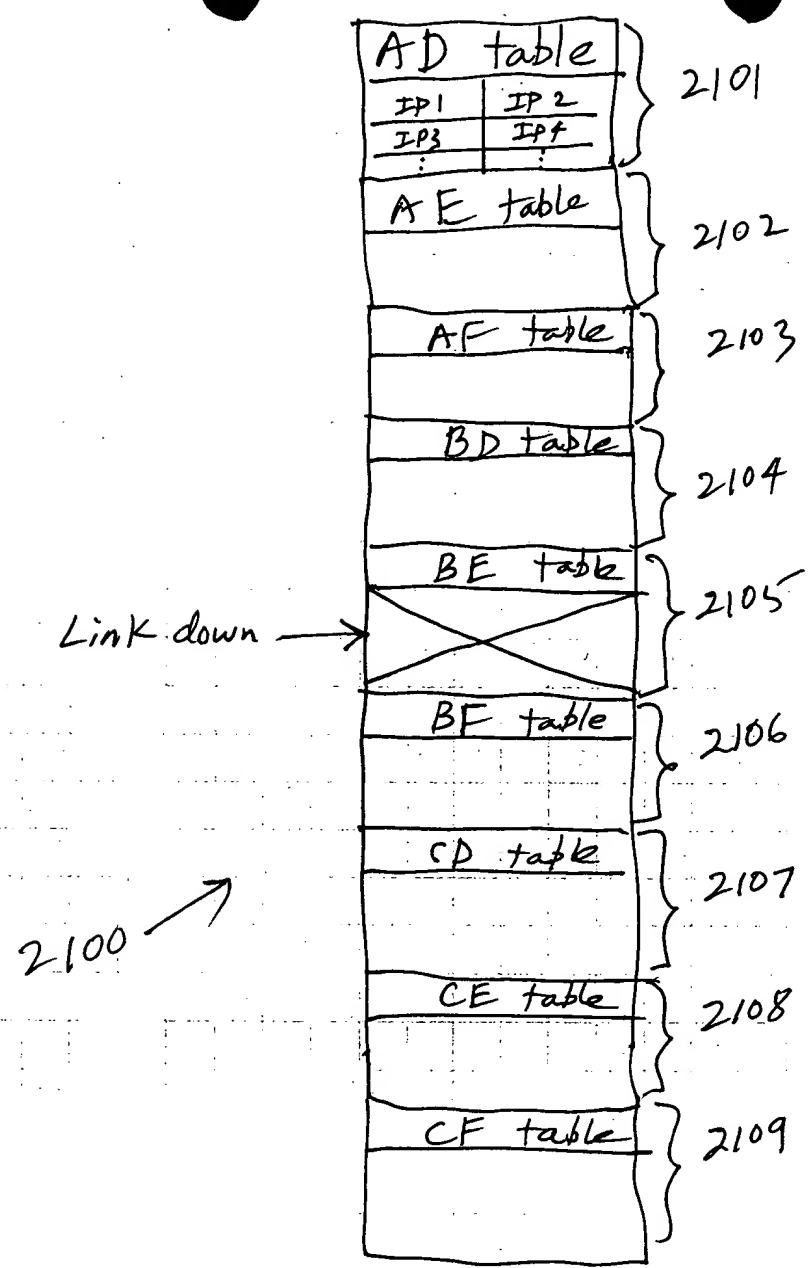


FIG. 21